

Datasheet



Wall-Type Penstock Cover



Equipment Description


It is a type of valve commonly used to control the flow of water and determine the direction of flow in plants. A penstock cover consists of gate that operate on a vertical axis, which can be actuated manually or by means of an actuator.

The penstock cover is controlled by a mechanically operated shaft. The shaft can be automatically actuated using an actuator. This can be triggered when specific set levels are reached, ruling out the need for any human interaction. Penstocks covers can also be made leak-proof on all four sides, which is something stoplogs are incapable of.

For the covers we manufacture as Ptech GmbH, we are using only high-quality stainless steel as material, grade AISI 304 or AISI 316 / AISI 316L. Depending on the size of the penstock, we select the most suitable sealing solution to meet the sealing requirements. We use high-grade NBR nitrile rubber as the sealing material, which has high resistance to wear and tear in corrosive wastewater. Additionally, the structural shape of it also guarantees maximum service life of the gasket. The penstock cover can be mounted to the surface with bolts or installed in a channel with joint filling.

Advantages

- The most suitable method for open channel use case scenarios.
- 100% Leakproof.
- Lightweight and Compact.
- Much less leakage than what is expected from approved standards.
- Mechanically fixated.
- Low-maintenance gaskets that are only attached to the cover gate.
- Wall, channel, or side wall fixation can be disassembled at will.
- Designed individually to meet the needs of every application.
- Flexible gaskets.
- Versatile production according to customer needs.

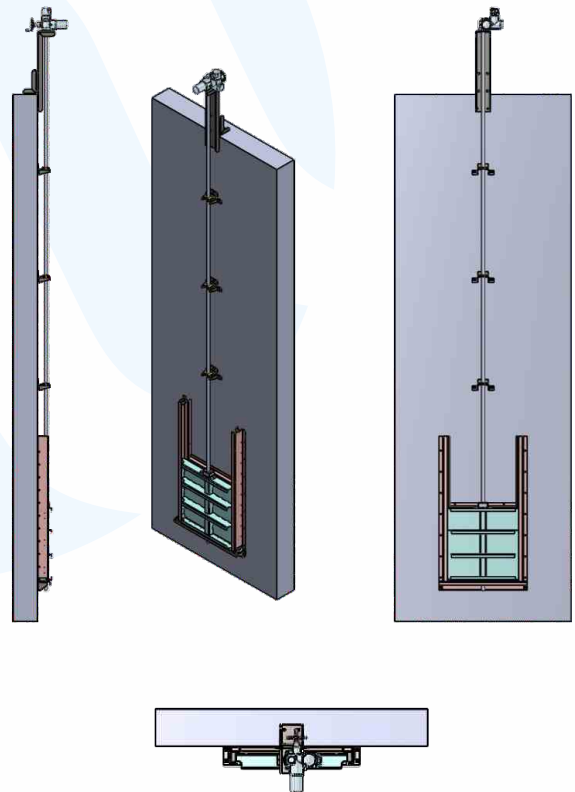

Areas of Use

- Water Treatment Plants
- Wastewater Treatment Plants
- Industrial Wastewater Treatment Plants
- Pump Stations



TABLE OF MATERIALS

ID	Explanation	Material
1	Chassis	AISI 304 L / AISI 316 L
2	Side Impermeability	UHMW/PTFE (*)
3	Bottom Impermeability	EPDM/ VITON (*)
4	Body	AISI 304 L / AISI 316 L
5	Drive Shaft	ASTM A276 TP 410 (*)
6	Extension Shaft	ASTM A276 TP 304 / ASTM A276 TP 316 (*)
7	Bolt and Nut	AISI 304 L / AISI 316 L
8	Control	Manuel / Automatic

MAXIMUM TEMPERATURE

EPDM (°C)	PTFE (°C)	VITON (°C)
-5 to 100	-17 to 165	-25 to 195

(*) Other alternatives upon request.



+49 163 7037447

info@ptech-gmbh.com • www.ptech-gmbh.com



Ptech

ENERGY - WATER - SEWAGE TREATMENT TECHNOLOGY

Umwelttechnik GmbH



+49 163 7037447
info@ptech-gmbh.com
Katzwanger Str. 150, 90461
Nürnberg, Germany

📷 ptechgmbh
🌐 Ptech Umwelttechnik GmbH
📺 @PtechGmbH

www.ptech-gmbh.com